



EVX12120 T11 (12V 120Ah)



Specifications

Rated Voltage	12V	
Nominal Capacity	120Ah (C ₂₀ 1.80V/cell)	
Dimensions	Length	330 mm
	Width	173 mm
	Container Height	213 mm
	Total Height	220 mm
Approx. Weight	32.8 Kg (73.31lbs)	
Terminal	T11	
Layout	1	
Container material	ABS	
Rated Capacity (25°C)	120.0Ah	(20hr, 6.0A, 1.80V/cell)
	114.0Ah	(10hr, 11.4A, 1.80V/cell)
	106.0Ah	(5hr, 21.2A, 1.75V/cell)
	100.0Ah	(3hr, 33.3A, 1.75V/cell)
Reserve Capacity (min)	240	25A
	68	75A
Operating Temp. Range	Discharge: -20~50°C (-4~131°F)	
	Charge: 0~40°C (32~104°F)	
	Storage: -15°C ~40°C (5~104°F)	
Nominal Operating Temp. Range	25±3°C (77±5 °F)	
Cycle Use	Initial Charging Current less than 30.0A. Voltage	
	14.7V~14.9V at 25 °C(77 °F)Temp. Coefficient -24mV/ C	
	40°C (104°F) 103%	
Effect Of Temp. To Capacity	25°C (77°F)	100%
	0°C (32°F)	75%
Self-discharge	EVX series batteries may be stored for up to 6 months at 25 °C (77 °F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	


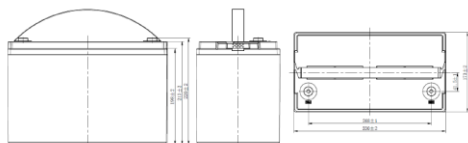


Features

- True deep cycle AGM-GEL technology - GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & high energy density
- Super anti-vibration design
- Low self-discharge for longer shelf life

Layout

Terminal



Applications

- Mobility scooters
- Wheelchair
- Golf carts
- Sweeping machine

General Features

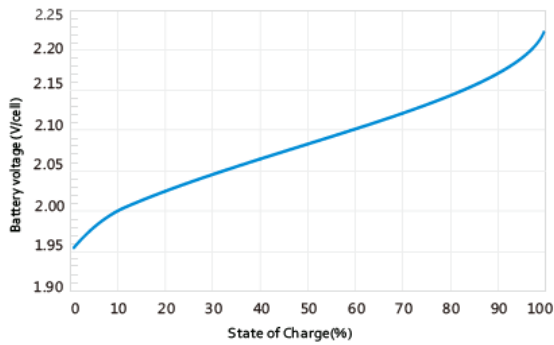
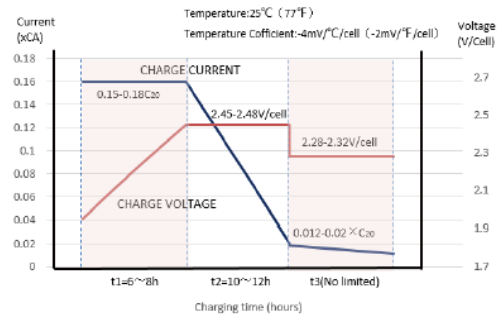
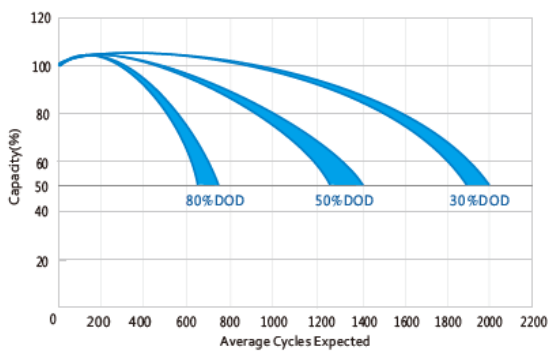
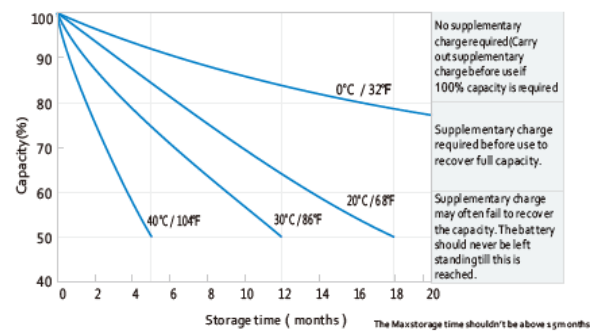
- Special plate design, long cycle life
- ≥700-750 Cycles @ 80%DOD
- Operation temperature -20~55°C
- ≤3% Self discharge per month
- Good deep discharge resilience performance

Standards

- IATF 16949
- ISO 14001
- ISO 9001



EVX12120 T11 (12V 120Ah)

**Relationship of OCV and State Of Charge (25°C, 77°F)****Charging Characteristics****Cycle Life In Relation To Depth Of Discharge****Self-discharge Characteristic**

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.