

Automatic
BATTERY
CHARGEUR
with
microprocess

BATIUM 7-24



6 - 12 - 24V

The *Batium* range controlled by *microprocessor* guarantees you the maximum effectiveness and security.



15 ▶ 130 Ah
GEL/AGM/VRLA/LIQUIDE



The charge is **automatic/without supervision**.

50% shorter charge time compared to a traditional charger. Batium ensures an ultra-quick and safe charge, by providing a **constant average current** during "boost" phase.



Ref. **024502**

Batium ensures a **100% charge** of all lead-acid batteries* (IwUoU curve). A standard "automatic" charger, W2 or WU curve, charges up to 90% only.

Batium is a microprocessor controlled **smart charger**, that constantly analyses the state of the battery and regulates the charge according to the battery's needs.

Deeply discharged batteries that are still in a good state of health (eg : Lights on when the vehicle is stopped) could have a voltage as low as 1V. Batium can **charge from 2 volt**, whereas most chargers cannot.

Protection of the on-board electronics. No need to disconnect the battery from the vehicle. No risk of sparks or short-circuits, and no current is supplied to the clamps unless they are connected to the battery terminals.

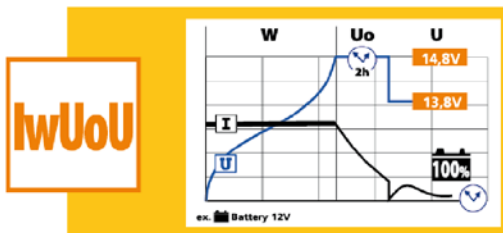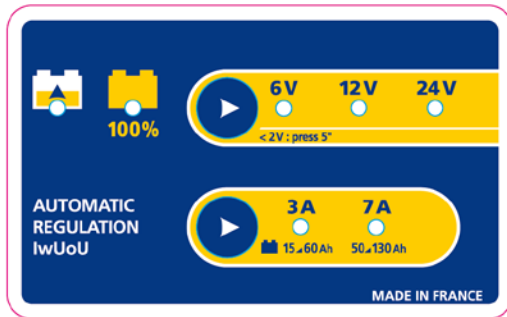

CE EN 60335-2-29

| 50/60Hz | 210W | 6-12-24V | Reg 2 | EFFICACE /RMS | MOYEN/AVERAGE Reg 1 Reg 2 Reg 3 | FUSE | 21x34x13 cm | 5,7 kg | SOS RECOVERY |
|---------|------|----------|-------|---------------|------------------------------------|------|-------------|--------|--------------|
| 230V | 210W | 6-12-24V | 2 | 11A | 3A 7A - | 15A | 21x34x13 cm | 5,7 kg | - |