

LFP POW12-22 (12.8V 22Ah)



Item Code: LFP POW12-22
 EAN: 8717101000960

Specifications

Nominal Voltage	12.8V	
Approx. Weight	2.3 ± 0.2 Kg	5.07 ± 0.44 lbs
Container Material	ABS	
Cell Type-Chemistry	LiFePO4 Cylindrical cell	
Rated Capacity (25 ° C)	22.0Ah	5hr, 4.40A, 1.75V/cell
Energy	281.6Wh	
Internal Resistance	≤40.0m Ω	
Efficiency	80%	
Cycle Life 0.2C	>2000 cycles	100% D.O.D.
	>3000 cycles	90% D.O.D.
	>4000 cycles	80% D.O.D.
Bluetooth	No	
Charger	Included	




Certificates/ standards

- CE Certified

Dimensions

Layout

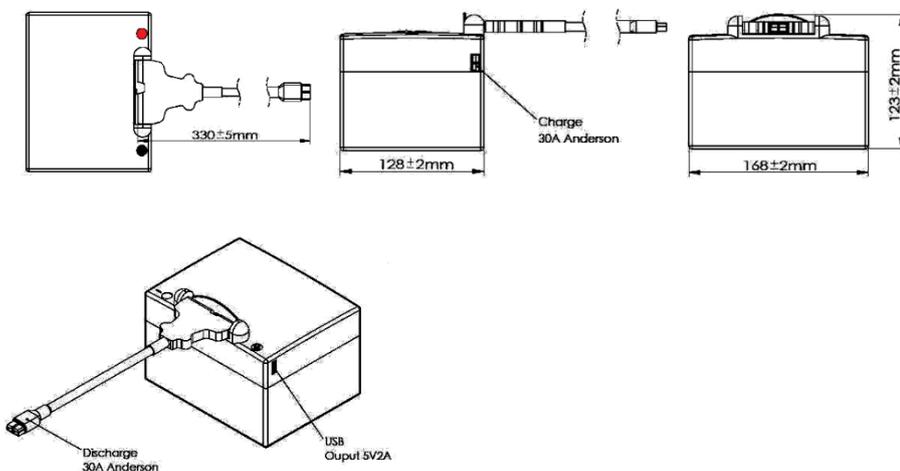

Length	168 mm
Width	128 mm
Container Height	123 mm
Total Height	123 mm

Terminal	TBAR
Layout	0



Discharge Parameters

Continuous Discharge Current	30A
Pulse Discharge Current	120A (>1.0 seconds)
Recommended Volt. Disconnect	10V
BMS Discharge Cut-off Voltage	8.0V
Reconnect Voltage	10.0V


Charge Parameters

Charge Method	CC - CV
Charge Voltage	14.6V
Recommended Charge Current	≤11.0A
Maximum Charge Current	30A
BMS Charge Cut-off Voltage	15.6V


Temperature Parameters

Recommended Discharge Temperature	-20°C to 60°C
Limit Discharge Temperature	-20°C to 65°C
Recommended Charge Temperature	0°C to 45°C
Limit Charge Temperature	0°C to 60°C
Storage Temperature range	0°C to 40°C
Recommended long-term storage	15°C to 25°C
BMS High Temperature Cutt-off	65°C


Discharge 0.1, 25°C Cycle Life vs Depth of Discharge (DOD)

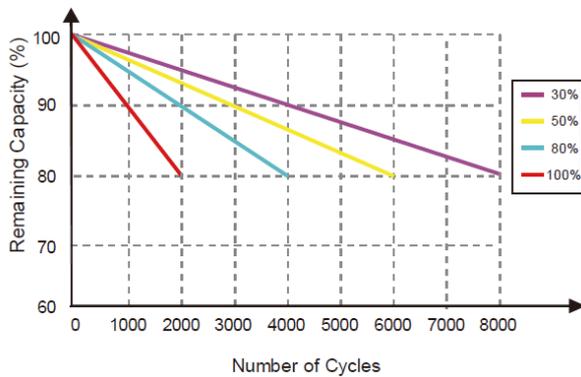


Discharge 1C Discharge Capacity at Various

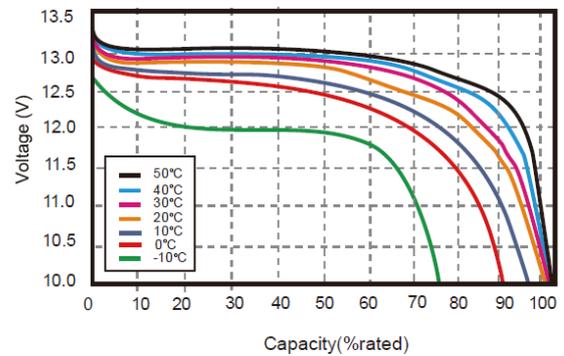

0.5C, 25 °C State of Charge

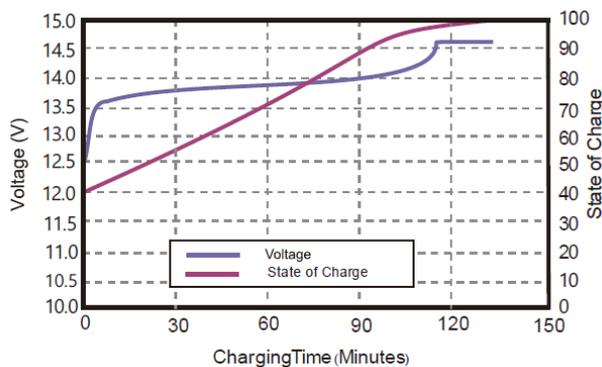

0.5C, 25 °C Charging Characteristics

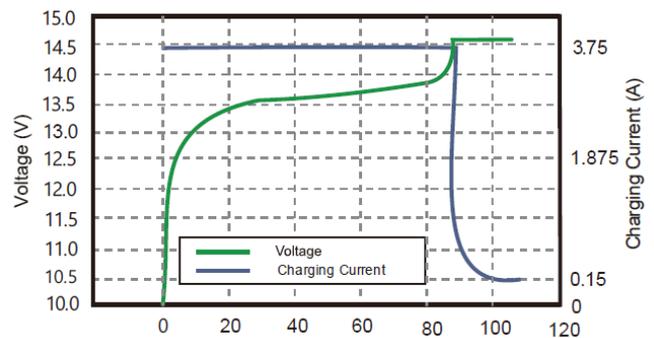

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.