

LFP12.8-100 (12.8V 100Ah)

Specifications	
Nominal Voltage	12.8V
Rated Capacity (10HR)	100Ah
Weight	10.5 kg
Energy	1280Wh
Cycle Life	>3500cycles @0.5C, 25°C , 80% DOD
Self Discharge	2% per Month
Dimensions	Length 330 mm Width 172 mm Container Height 214 mm Total Height 214 mm
Terminal Type	T11
Battery Housing	ABS,
Housing Protection	IP30
Cell Type-Chemistry	LiFePO4 Prismatic Cell
SOC Display	LED Indicator
Communication port	RS485-USB; CAN
Protection	Over charge, Over Discharge, Over Temperature, Over Current, Short Circuit
Parallel Support	Yes, Max. 4 Sets
Series Support	Yes, Max. 4 Sets

Performance

- Long Cycle Life>3500 cycles @80% DOD.
- High Density, High Discharge Current, High Temperature Range.
- Low Weight, Free Maintenance.
- Fast Charging.
- Environment Friendly.



Description and Features

The LFP series is full-fledged lead acid battery replacement with all the advantages of LiFePO4 technology including a detachable ABS case. With the communication port, each battery can be monitored for its performance. This lithium battery ensures maximum safety and long service life even with regular deep discharge.

Features

- Excellent performance
- Long cycle life
- Safest lithium technology (LiFePO4)
- Integrated BMS
- Detachable ABS case
- Communication port (CAT5E)
- Integrated bluetooth monitoring

Layout Terminal


Discharge Parameters	
Continuous Discharge Current	100A
Recommended Volt. Disconnect	11,2V
BMS Discharge Cut-off Voltage	10V


Charge Parameters	
Charge Method	CC-CV
Charge Voltage	14.2~14.6V
Recommended Charge Current	50A
Maximum Charge Current	100A


Temperature Param	eters
Discharge Temperature	-20 to +55 °C (-4 to +131 °F)
Charge Temperature	0 to +50 °C (32 to +122 °F)




LFP12.8-100 (12.8V 100Ah)

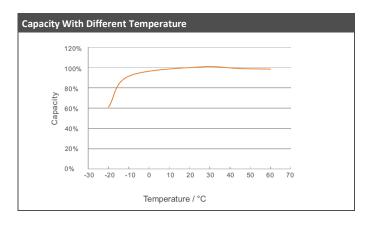

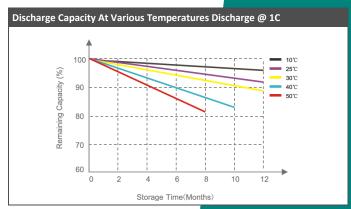

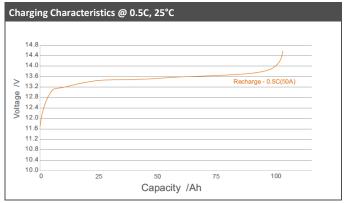

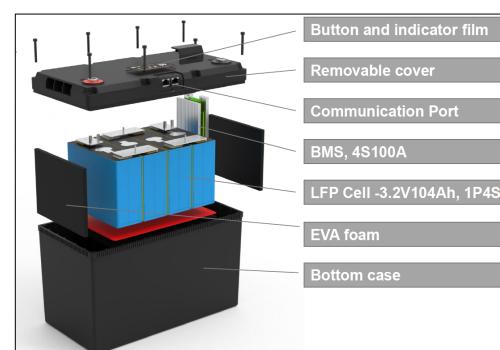



Button and indicator film

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.