

LP12-2.9 (12V 2.9Ah)



Since 1993

6-2-2026

Item Code: NSA LP12-2,9 T1
 EAN: 8717101024133

Specifications

Nominal Voltage	12		
Approx. Weight	1.10 Kg (2.43lbs)		
Container Material	ABS		
Rated Capacity (25 °C)	2.90 Ah	20hr, 0.145A, 1.75V/cell	
	2.70 Ah	10hr, 0.270A, 1.75V/cell	
	1.62 Ah	5hr, 0.325A, 1.75V/cell	
	2.13 Ah	3hr, 0.710A, 1.75V/cell	
	1.76 Ah	1hr, 1.76A, 1.60V/cell	
Short-circuit Current	81.2A		
Internal Resistance	Approx. 50.0 mΩ		
Operating Temp. Range	Discharge:	-15 °C ~ 50 °C	5 °F ~ 122 °F
	Charge:	-20 °C ~ 40 °C	-4 °F ~ 104 °F
	Storage:	-15 °C ~ 40 °C	5 °F ~ 104 °F
Nominal operating temp. Range	25±3°C (77±5°F)		
Effect of Temp. to Capacity	40 °C	104 °F	103%
	25 °C	77 °F	100%
	0 °C	32 °F	86%
Max. Charging Current (25°C)	0.87A		
Cycle Use	Voltage 14.6V~14.8V at 25°C (77 °F) Temp. Coefficient -5mV/Cell/°C		
Standby Use	Voltage 13.6V~13.8V at 25°C (77°F) Temp. Coefficient -3mV/Cell/°C		
Self-Discharge	Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.		
Design Life	5 years		




Certificates / Standards

- UL Certified MH48553
- CE Certified
- Manufactured in certified production facilities; IATF 16949/ ISO 9001/ ISO 14001




Dimensions

Layout

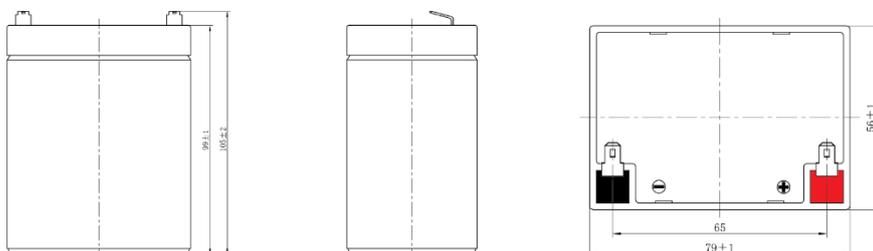

Length	79 mm
Width	56 mm
Container Height	99 mm
Total Height	105 mm

Terminal

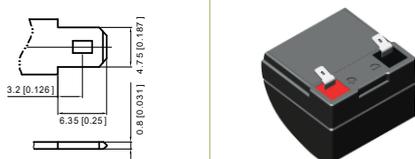

Terminal	T1
Layout	0

LP12-2.9 (12V 2.9Ah)



Since 1993


Constant Current Discharge Characteristics: Amperes (25 ° C)

F.V / Time	10 min	15 min	30 min	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	20 hr
1.85V	5.26	4.11	2.61	1.59	0.938	0.687	0.565	0.474	0.317	0.264	0.142
1.80V	5.58	4.31	2.69	1.63	0.955	0.699	0.573	0.481	0.321	0.267	0.143
1.75V	5.80	4.46	2.76	1.66	0.973	0.710	0.581	0.487	0.325	0.270	0.145
1.70V	6.04	4.60	2.83	1.70	0.987	0.720	0.589	0.494	0.328	0.273	0.146
1.67V	6.21	4.72	2.88	1.72	1.00	0.727	0.595	0.498	0.331	0.275	0.147
1.60V	6.47	4.88	2.96	1.76	1.02	0.741	0.605	0.506	0.336	0.278	0.149


Constant Power Discharge Characteristics: Watts/ cell (25 ° C)

F.V / Time	10 min	15 min	30 min	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	20 hr
1.85V	10.0	7.87	5.05	3.10	1.84	1.35	1.11	0.936	0.628	0.524	0.284
1.80V	10.5	8.21	5.18	3.16	1.87	1.37	1.13	0.948	0.637	0.531	0.287
1.75V	10.9	8.43	5.29	3.22	1.89	1.39	1.14	0.959	0.643	0.536	0.290
1.70V	11.3	8.66	5.40	3.26	1.92	1.41	1.15	0.971	0.649	0.541	0.292
1.67V	11.5	8.84	5.48	3.31	1.94	1.42	1.16	0.978	0.654	0.544	0.295
1.60V	11.8	9.08	5.60	3.37	1.97	1.44	1.18	0.991	0.663	0.551	0.298


Discharge Characteristic

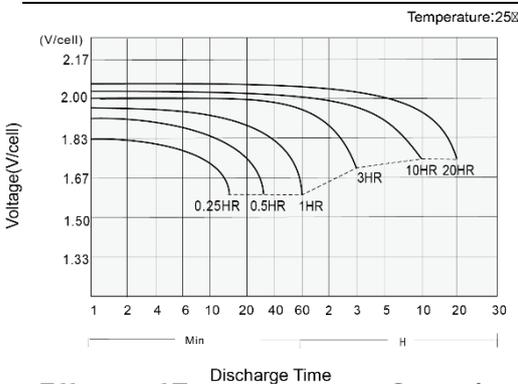


Charging Characteristics

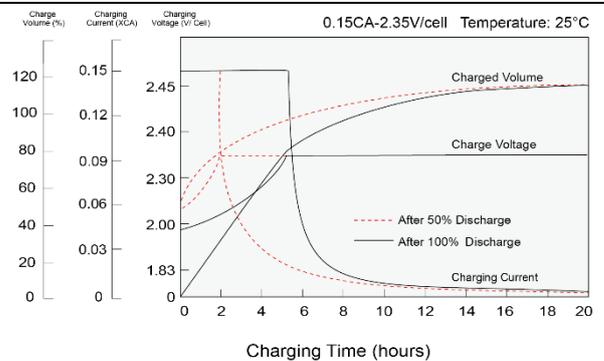

Effects of Temperature on Capacity

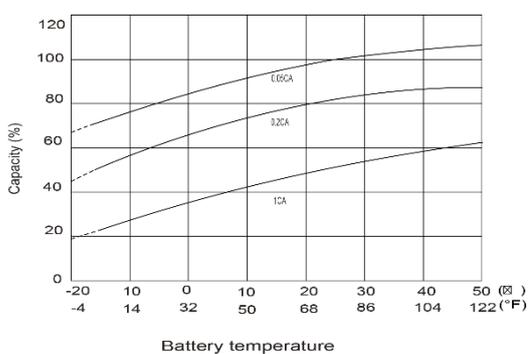

Self-Discharge Characteristics

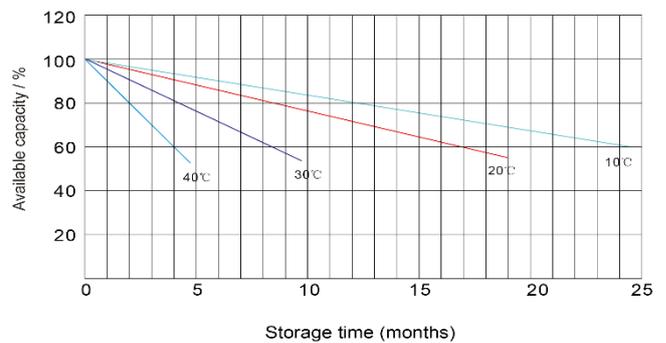

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.