



# LP6-3.2 (6V 3.5Ah)

Specifications	
Rated Voltage	6
Nominal Capacity	3.5 Ah (C <sub>20</sub> , 1.75V/cell)
Dimensions	Length 134 mm
	Width 34 mm
	Container Height 60 mm
	Total Height 66 mm
Approx. Weight	0.67 Kg (1.48lbs)
Terminal	T1
Layout	1
Container material	ABS
Rated Capacity (25°C)	3.50 Ah (20hr, 0.175A, 1.75V/cell)
	3.31 Ah (10hr, 0.331A, 1.75V/cell)
	3.01 Ah (5hr, 0.602A, 1.75V/cell)
	2.62 Ah (3hr, 0.872A, 1.75V/cell)
	2.15 Ah (1hr, 2.15A, 1.60V/cell)
Max. Discharge Current	48A (5s)
Internal Resistance (25°C)	Approx 30mΩ
	Discharge: -15°C ~50°C (5~122°F)
Operating Temp. Range	Charge: 0°C ~40°C (32~104°F)
	Storage: -15°C ~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 0.96A. Voltage 7.2V~7.5V at 25°C (77 °F)Temp. Coefficient -15mV/°C
	Initial Charging Current less than 0.96A. Voltage 6.75V~6.9V at 25°C (77 °F)Temp. Coefficient -10mV/°C
Standby Use	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Effect Of Temp. To Capacity	LP series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Self Discharge	



## Description and Features

The LP Series AGM batteries have been specially developed to be widely applicable. These lead acid batteries with AGM technology are completely sealed and therefore 100% maintenance free and leak-proof. These batteries have a low self-discharge. The reliable and safe multipurpose batteries from the LP Series offer a long service life and can be used in various industries.

- Features**
- Absorbent Glass Mat technology
  - Reliable and safe performance
  - Long service life - 3-5 years in standby application (at 25°C)
  - Suitable for multipurpose applications

Layout	Terminal	UL certification


Constant Current Discharge Characteristics: A (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1Hr	1.5Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	10.6	7.36	5.72	4.66	3.43	2.47	1.94	1.45	1.15	0.845	0.681	0.586	0.502	0.396	0.323	0.171
1.80V/cell	11.4	7.80	6.01	4.84	3.53	2.54	1.99	1.48	1.18	0.859	0.691	0.595	0.510	0.401	0.328	0.173
1.75V/cell	12.0	8.11	6.21	4.98	3.62	2.59	2.03	1.50	1.20	0.872	0.700	0.602	0.516	0.406	0.331	0.175
1.70V/cell	12.5	8.44	6.41	5.12	3.72	2.65	2.07	1.53	1.21	0.885	0.710	0.611	0.522	0.410	0.334	0.176
1.67V/cell	13.0	8.67	6.57	5.23	3.78	2.69	2.10	1.55	1.23	0.894	0.717	0.616	0.527	0.413	0.337	0.178
1.60V/cell	13.8	9.04	6.80	5.38	3.88	2.76	2.15	1.58	1.25	0.910	0.729	0.626	0.534	0.419	0.341	0.180

Constant Power Discharge Characteristics: Wpc (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1Hr	1.5Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	20.0	14.0	11.0	8.97	6.62	4.79	3.78	2.82	2.26	1.66	1.34	1.16	0.99	0.784	0.643	0.342
1.80V/cell	21.3	14.7	11.4	9.28	6.80	4.90	3.86	2.87	2.29	1.68	1.36	1.17	1.01	0.795	0.651	0.346
1.75V/cell	22.2	15.2	11.7	9.48	6.94	4.99	3.93	2.92	2.33	1.71	1.38	1.19	1.02	0.803	0.657	0.350
1.70V/cell	23.0	15.7	12.1	9.70	7.09	5.08	3.99	2.96	2.36	1.73	1.39	1.20	1.03	0.810	0.663	0.353
1.67V/cell	23.6	16.1	12.3	9.88	7.20	5.15	4.04	2.99	2.38	1.74	1.40	1.21	1.04	0.816	0.668	0.356
1.60V/cell	24.6	16.5	12.7	10.1	7.36	5.24	4.11	3.04	2.42	1.77	1.42	1.23	1.05	0.827	0.675	0.359




# LP6-3.2 (6V 3.5Ah)


## Discharge Characteristics

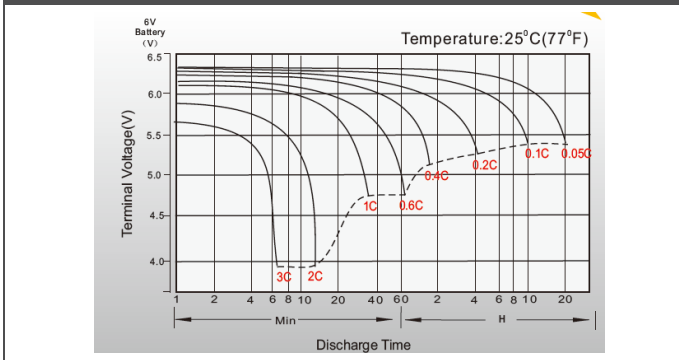


## Float Charging Characteristics

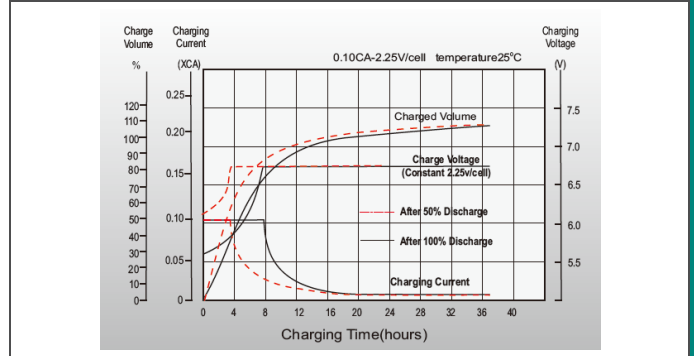

## Temperature Effects In Relation To Battery Capacity

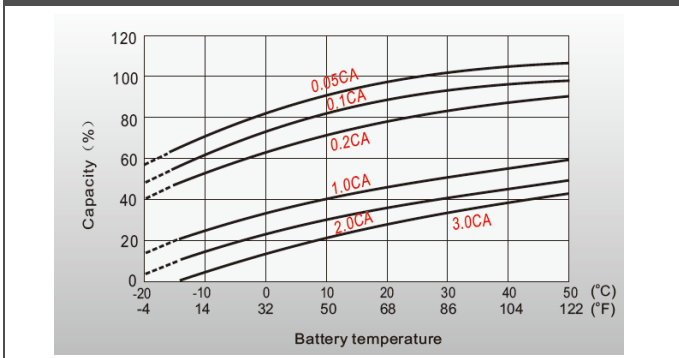

## Float Service Life

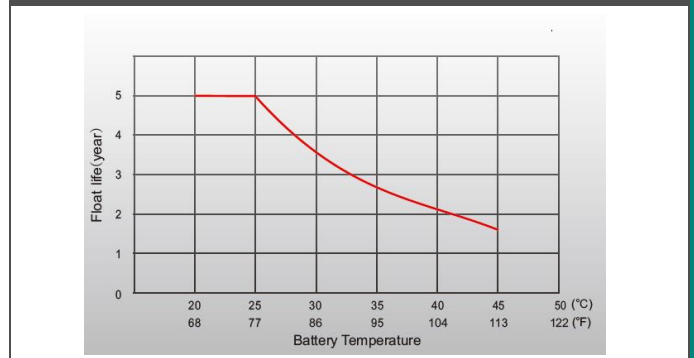

### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

### General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- IATF16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.