



# LP6-6 (6V 6.0Ah)

Specifications	
Rated Voltage	6
Nominal Capacity	6.0Ah (C <sub>20</sub> , 1.75V/cell)
Dimensions	Length 70 mm
	Width 47 mm
	Container Height 100 mm
	Total Height 106 mm
Approx. Weight	0.90 Kg (1.98lbs)
Terminal	T1
Layout	5
Container material	ABS
Rated Capacity (25°C)	6.00 Ah (20hr, 0.300A, 1.75V/cell)
	5.52 Ah (10hr, 0.552A, 1.75V/cell)
	5.05 Ah (5hr, 1.01A, 1.75V/cell)
	4.14 Ah (3hr, 1.38A, 1.75V/cell)
	3.68 Ah (1hr, 3.68A, 1.60V/cell)
Max. Discharge Current	90A (5s)
Internal Resistance (25°C)	Approx 16mΩ
	Discharge: -15°C ~50°C (5~122°F)
Operating Temp. Range	Charge: 0°C ~40°C (32~104°F)
	Storage: -15°C ~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 1.8A. Voltage 7.2V~7.5V at 25°C (77 °F)Temp. Coefficient -15mV/°C
Standby Use	Initial Charging Current less than 1.8A. Voltage 6.75V~6.9V at 25°C (77 °F)Temp. Coefficient -10mV/°C
Effect Of Temp. To Capacity	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.



## Description and Features

The LP Series AGM batteries have been specially developed to be widely applicable. These lead acid batteries with AGM technology are completely sealed and therefore 100% maintenance free and leak-proof. These batteries have a low self-discharge. The reliable and safe multipurpose batteries from the LP Series offer a long service life and can be used in various industries.

### Features

- Absorbent Glass Mat technology
- Reliable and safe performance
- Long service life - 3-5 years in standby application (at 25°C)
- Suitable for multipurpose applications

Layout	Terminal	UL certification


Constant Current Discharge Characteristics: A (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1Hr	1.5Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	17.9	12.7	9.79	7.96	5.76	4.14	3.33	2.40	1.85	1.33	1.10	0.941	0.820	0.649	0.539	0.294
1.80V/cell	19.2	13.4	10.3	8.28	5.94	4.25	3.41	2.45	1.88	1.36	1.11	0.982	0.828	0.658	0.546	0.297
1.75V/cell	20.3	14.0	10.6	8.51	6.09	4.34	3.48	2.49	1.92	1.38	1.13	1.01	0.839	0.676	0.552	0.300
1.70V/cell	21.2	14.5	11.0	8.76	6.25	4.44	3.55	2.53	1.95	1.40	1.14	1.03	0.860	0.684	0.559	0.303
1.67V/cell	22.0	15.0	11.2	8.94	6.36	4.51	3.60	2.57	1.97	1.41	1.16	1.01	0.871	0.692	0.566	0.305
1.60V/cell	23.3	15.6	11.6	9.20	6.53	4.62	3.68	2.62	2.01	1.44	1.18	1.02	0.882	0.701	0.570	0.309

Constant Power Discharge Characteristics: Wpc (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1Hr	1.5Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	33.8	24.1	18.7	15.3	11.1	8.03	6.48	4.68	3.62	2.62	2.21	1.89	1.66	1.32	1.08	0.588
1.80V/cell	36.0	25.4	19.5	15.9	11.4	8.22	6.62	4.76	3.68	2.66	2.24	1.91	1.67	1.33	1.08	0.594
1.75V/cell	37.5	26.2	20.1	16.2	11.7	8.36	6.72	4.83	3.73	2.70	2.27	1.93	1.69	1.34	1.10	0.600
1.70V/cell	38.9	27.1	20.6	16.6	11.9	8.52	6.83	4.91	3.78	2.73	2.29	1.96	1.70	1.35	1.11	0.606
1.67V/cell	40.0	27.7	21.1	16.9	12.1	8.63	6.92	4.96	3.81	2.75	2.31	1.98	1.72	1.37	1.12	0.610
1.60V/cell	41.6	28.5	21.6	17.3	12.4	8.79	7.04	5.04	3.88	2.80	2.33	2.01	1.74	1.39	1.13	0.619




# LP6-6 (6V 6.0Ah)


## Discharge Characteristics

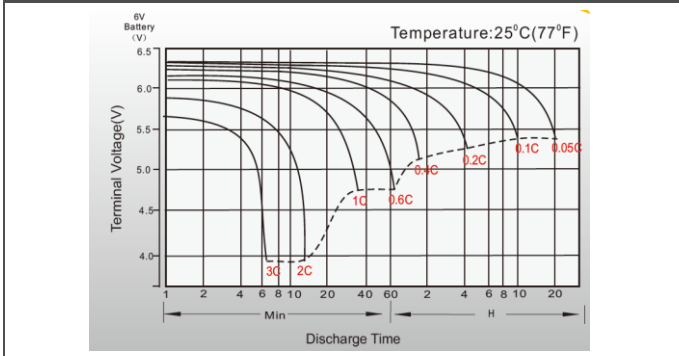


## Float Charging Characteristics

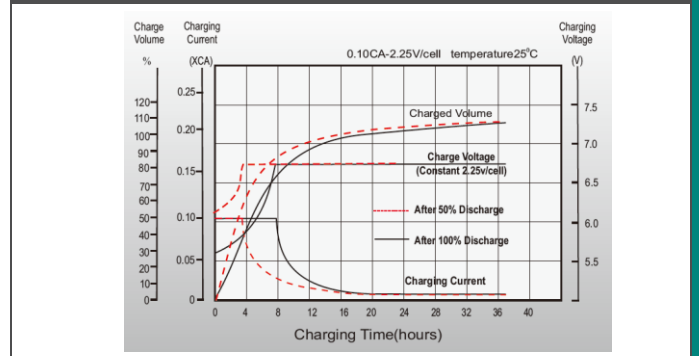

## Temperature Effects In Relation To Battery Capacity

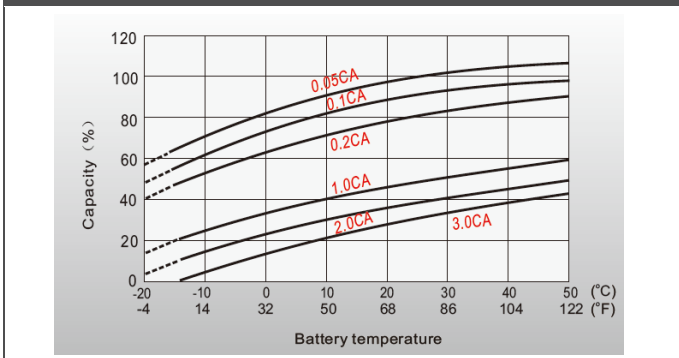

## Float Service Life

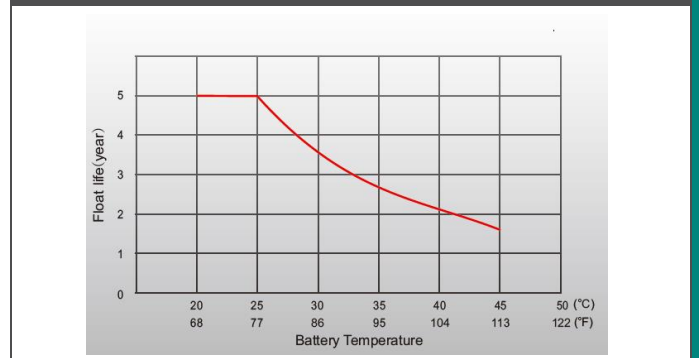

### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

### General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- UKCA Certified (for UK)
- IATF16949, ISO45001,ISO 9001 and ISO 14001 certified production facilities

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.