

DUAL 24DC (12V 75Ah)

STV 24DC

Item Code: DUAL 24DC
 EAN: 8717101021798


Description

Dynac Semi-Traction provides reliable energy for onboard consumers in motorhomes, caravans, boats, trucks and buses. Designed for cyclic use, it powers applications such as lighting, refrigerators, onboard computers and tail lifts. The battery withstands deep discharges up to 50%, is suitable for seasonal use and is ideal for leisure vehicles with light to medium power demands. Available as a 12V battery from 50Ah to 230Ah in wet charged and sealed maintenance-free (SMF) versions.


Specifications

Nominal Voltage	12	
Rated Capacity (25 °C)	75.00 Ah	20hr, 3.75A, 1.75V/cell
Reserve Capacity (25A)	140 A	
Cold Cranking Ampere	520 A	
Technology	Flooded Calcium	
Separator	PE	
Container Material	Polypropylene	
Box Type	24	
Approx. Weight	17.70 Kg (39.02lbs)	
Layout	1	
Terminal	Dual	
Hold-down	B1	
Dimensions	Length	260 mm
	Width	172 mm
	Height	200 mm
	Total Height	223 mm


Terminal



Position of terminal



Hold-down

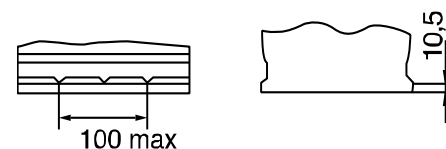

Battery Classifications EN 50342-6

Water Consumption	Charge Retention	Vibrations Resistance	Endurance Level	Micro-Cycle Performance
W4	C2	V2	E1	-

Charging Instructions

Cycle Charging Voltage Recommendation	14.4 V
Maximum Charging Current for Cycle Use	50 (Absorption charging recommended, constant current 14.4V not exceeding 50A)
Float Charging Voltage Recommendation	13.35 V
Cycles at 50% Depth of Discharge	350

Certificates / Standards

- CE Certified



(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information