

Item Code: DUAL 96801
 EAN: 8717101013731


Description

Dynac Semi-Traction provides reliable energy for onboard consumers in motorhomes, caravans, boats, trucks and buses. Designed for cyclic use, it powers applications such as lighting, refrigerators, onboard computers and tail lifts. The battery withstands deep discharges up to 50%, is suitable for seasonal use and is ideal for leisure vehicles with light to medium power demands. Available as a 12V battery from 50Ah to 230Ah in wet charged and sealed maintenance-free (SMF) versions.


Specifications

Nominal Voltage	12	
Rated Capacity (25 °C)	230.00 Ah	20hr, 11.50A, 1.75V/cell
Reserve Capacity (25A)	460 A	
Cold Cranking Ampere (CCA)	1300 A	
Technology	Flooded Low Antimony	
Separator	PE	
Container Material	Polypropylene	
Box Type	C	
Approx. Weight	60.40 Kg (133.15lbs)	
Layout	3	
Terminal	1	
Hold-down	-	
Dimensions	Length	514 mm
	Width	276 mm
	Height	222 mm
	Total Height	242 mm

Terminal

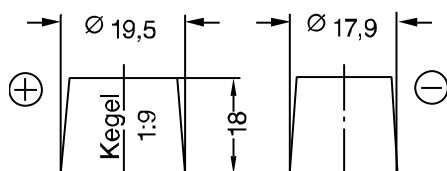

Position of terminal



Hold-down

-



Battery Classifications EN 50342-6

Water Consumption	Charge Retention	Vibrations Resistance	Endurance Level	Micro-Cycle Performance
W2	C2	V1	E2	-

Charging Instructions

Cycle Charging Voltage Recommendation	14.7 V
Maximum Charging Current for Cycle Use	23 A
Float Charging Voltage Recommendation	13.38 V
Float Charge Recommendation	2.3 A
Cycles at 50% Depth of Discharge	400

Certificates / Standards

- CE Certified



(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information