



LP12-24 (12V 24Ah)


Specifications	
Rated Voltage	12
Nominal Capacity	24.0Ah (C ₂₀ , 1.75V/cell)
Dimensions	Length 166 mm
	Width 175 mm
	Container Height 125 mm
	Total Height 125 mm
Approx. Weight	7.2 Kg (15.9 lbs)
Terminal	T12
Layout	0
Container material	ABS
Rated Capacity (25°C)	24.0 Ah (20hr, 1.20A, 1.75V/cell)
	22.7 Ah (10hr, 2.27A, 1.75V/cell)
	19.9 Ah (5hr, 3.97A, 1.75V/cell)
	17.3 Ah (3hr, 5.75A, 1.75V/cell)
	14.3 Ah (1hr, 14.3A, 1.60V/cell)
Max. Discharge Current	360A (5s)
Internal Resistance (25°C)	Approx 18mΩ
	Discharge: -15°C ~50°C (5~122°F)
Operating Temp. Range	Charge: 0°C ~40°C (32~104°F)
	Storage: -15°C ~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 7.2A. Voltage 14.4V~15.0V at 25°C (77 °CF)Temp. Coefficient -30mV/°C
Standby Use	Initial Charging Current less than 7.2A. Voltage 13.5V~13.8V at 25°C (77 °CF)Temp. Coefficient -20mV/°C
	40°C (104°F) 103%
Effect Of Temp. To Capacity	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.



Description and Features

The LP Series AGM batteries have been specially developed to be widely applicable. These lead acid batteries with AGM technology are completely sealed and therefore 100% maintenance free and leak-proof. These batteries have a low self-discharge. The reliable and safe multipurpose batteries from the LP Series offer a long service life and can be used in various industries.

- Features**
- Absorbent Glass Mat technology
 - Reliable and safe performance
 - Long service life - 3-5 years in standby application (at 25°C)
 - Suitable for multipurpose applications

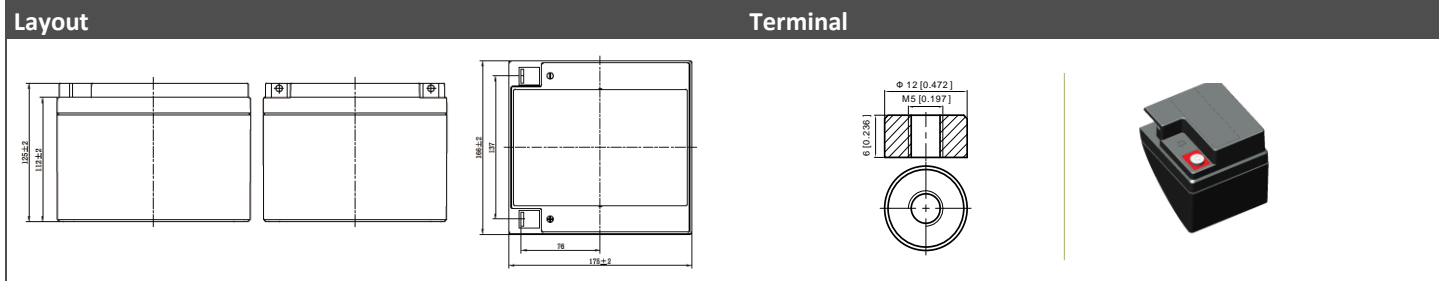


Constant Current Discharge Characteristics: A (25°C)																
F.V./Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1 Hr	1.5 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	60.6	42.2	33.8	28.1	21.2	15.6	13.0	9.61	7.63	5.57	4.49	3.86	3.34	2.67	2.22	1.17
1.80V/cell	65.2	44.7	35.5	29.3	21.8	16.1	13.3	9.80	7.78	5.66	4.55	3.92	3.40	2.71	2.25	1.19
1.75V/cell	68.7	46.5	36.7	30.1	22.4	16.4	13.6	10.0	7.92	5.75	4.61	3.97	3.43	2.74	2.27	1.20
1.70V/cell	72.0	48.4	37.9	30.9	23.0	16.8	13.8	10.2	8.03	5.84	4.68	4.02	3.48	2.76	2.29	1.21
1.67V/cell	74.4	49.8	38.9	31.6	23.4	17.1	14.0	10.3	8.12	5.89	4.72	4.06	3.51	2.79	2.31	1.22
1.60V/cell	79.0	51.9	40.2	32.5	24.0	17.5	14.3	10.5	8.29	6.00	4.81	4.12	3.56	2.82	2.34	1.23

Constant Power Discharge Characteristics: Wpc (25°C)																
F.V./Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1 Hr	1.5 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	114.7	80.3	64.8	54.2	40.9	30.4	25.2	18.8	14.9	10.9	8.84	7.62	6.61	5.29	4.41	2.35
1.80V/cell	122.2	84.6	67.6	56.1	42.0	31.1	25.8	19.1	15.2	11.1	8.95	7.72	6.71	5.36	4.46	2.37
1.75V/cell	127.3	87.3	69.4	57.3	42.9	31.6	26.2	19.4	15.4	11.3	9.06	7.81	6.77	5.41	4.50	2.40
1.70V/cell	132.0	90.2	71.3	58.6	43.8	32.2	26.6	19.7	15.6	11.4	9.17	7.91	6.85	5.46	4.55	2.42
1.67V/cell	135.5	92.2	72.8	59.7	44.4	32.6	26.9	19.9	15.8	11.5	9.25	7.96	6.90	5.50	4.58	2.44
1.60V/cell	141.0	94.9	74.8	61.2	45.4	33.2	27.4	20.2	16.0	11.7	9.39	8.07	6.99	5.58	4.63	2.47




LP12-24 (12V 24Ah)


Discharge Characteristics

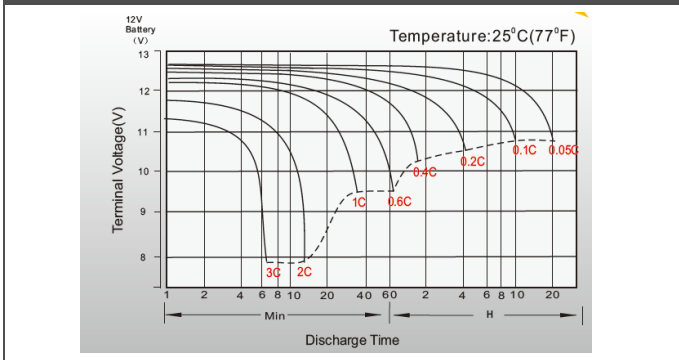


Float Charging Characteristics

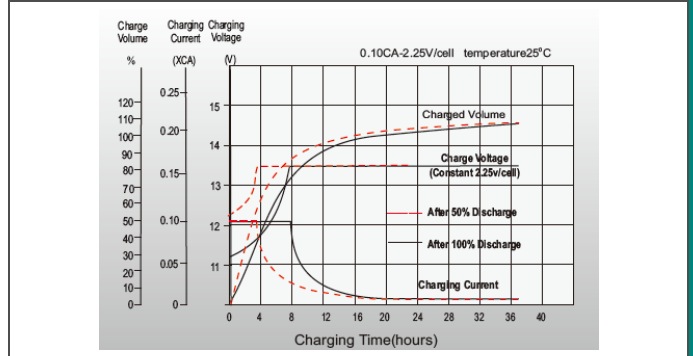

Temperature Effects In Relation To Battery Capacity

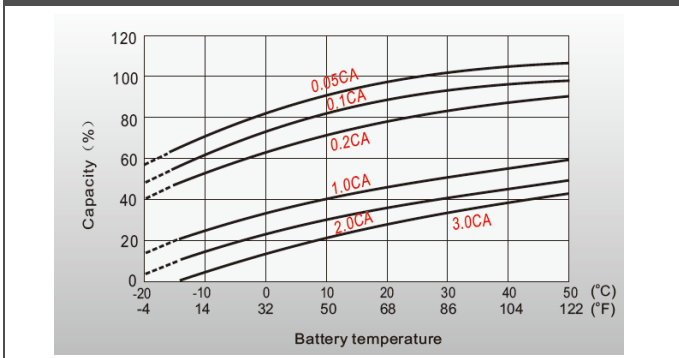

Float Service Life

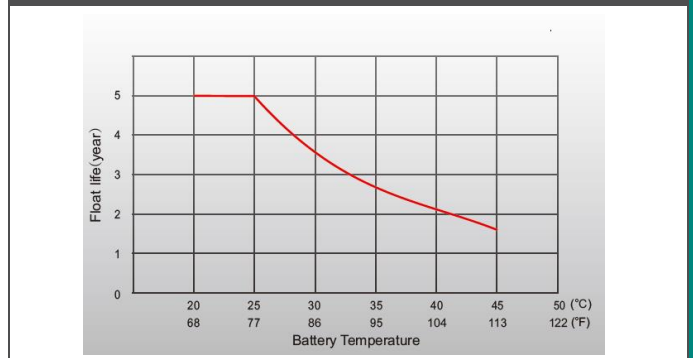

Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- IATF16949, ISO45001,ISO 9001 and ISO 14001 certified production facilities

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.