

Description

Dynac Semi-Traction is a semi-traction battery which provides energy for onboard energy consumers of motorhomes, caravans and boats or trucks and buses. These onboard energy consumers, such as lighting, refrigerators and onboard computers or tail lifts, demand massive cyclic performance of a battery. Dynac Semi-Traction is resistant to deep discharges up to 50% and is suitable for seasonal use. Ideal for leisure vehicles with light to medium power consumers. Available in a range of 12V batteries from 50Ah to 230Ah in series wet charged and sealed maintenance free (SMF).

Performance

Nominal Voltage	12
Capacity	105Ah (20hr, 1.75V/cell)
Capacity	85Ah (5hr, 1.7V/cell)
RC 25A	192

Dimensions / Casing / Weight

Box Type	Compact L
Dimensions	Length: 345 mm
	Width: 175 mm
	Height: 230 mm
	Total Height: 230 mm
Net Weight	26 Kg
Acid Volume	8.05
Material Casing / Lid	Polypropylene

Technical Characteristics



Technology	Flooded Hybrid
Separator	PE

Charging instructions

Cycle use charge recommendation, Voltage	14.7
Cycle use charge recommendation, Max Amps	10.5
Float charge recommendation, Voltage	13.38
Float charge recommendation Max Amps	1.05
Cycles at 50% DoD	400

Layout

Terminal

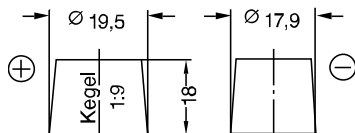

Features

- Reliable power supply
- Deep discharges up to 50%
- Ideal for seasonal use
- Available as wet charged or sealed maintenance free (SMF)
- Recommended for leisure vehicles with light to medium power consumers

Battery Classifications as per EN 50342-6

Water Consumption	Charge Retention	Vibration Resistance	Endurance Level
W2	C2	V1	E2

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.